
Overview


HPE ProLiant DL60 Generation9 (Gen9)

The HPE ProLiant DL60 Gen9 Server provides the right density, performance and manageability for file and print, messaging, collaboration workloads and cloud environments. All in a compact 1U chassis at an affordable price to meet the needs of cost conscious service providers and SMBs.

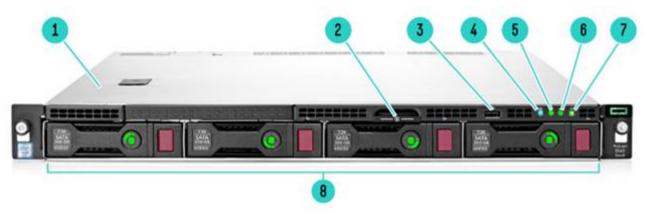

Front View

- 1 Access Panel
- 3 USB 2.0 connector
- 5 Health LED
- 7 Power On/Standby button and system power LED
- 2 Serial label pull tab
- 4 UID button/LED
- 6 NIC status LED
- 8 4LFF drive

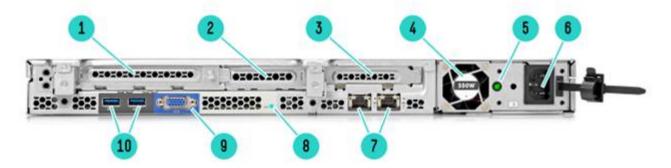


Rear view

- 1 Slot 3 PCle3 x8 (8, 4, 1)
- 3 Slot 1 PCle3 x16 (16, 8, 4, 1)
- 5 Power supply power LED
- 7 Embedded 2x1GbE network adapter
- 9 Video connector

- 2 Slot 2 PCle3 x8 (8, 4, 1)
- 4 Power supply bay (550w shown)
- 6 Power supply power connection
- 8 UID LED
- 10 USB3.0 connectors



Overview

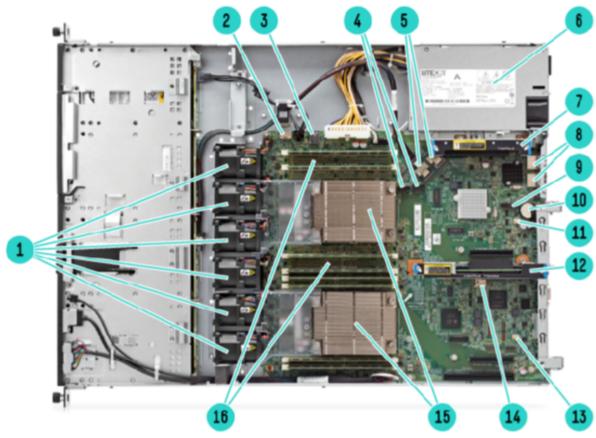

Internal View

- 1 Hot swappable fans (up to 6)
- 3 Internal USB 3.0
- 5 Mini-SAS connectors
- 7 Primary PCIe riser board connector
- 9 TPM connector
- 11 Storage backup power connector for PCle slots 1-2
- 13 Storage backup power connector for PCIe slot 3
- 15 Processor heat sinks (processors with HPE Smart Socket placed below heat sink)

What's New

- HPE Smart Memory 2400 MHz memory
- Intel Xeon E5-2600v4 processor support
- HPE Trusted Platform Module (TPM) 2.0
- New 900W AC/ 240VDC power supply
- New SATA Hot Plug Standard Drives

- 2 HPE Smart Storage Battery connector
- 4 SATA connector
- 6 Power supply bay
- 8 Embedded 2x1GbE network adapter
- 10 System Battery
- 12 Secondary PCIe riser slot
- 14 MicroSD slot
- 16 DDR4 DIMM slots (up to 8)



Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following http://www.intel.com/xeon.

Processor One of the following depending on model

| Model | CPU frequency | Cores | L3 Cache | Power | QPI | DDR4 Hz |
|------------|------------------|-------|----------|-------|---------|---------|
| E5-2660v3 | 2.6GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| E5-2650v3 | 2.3GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| E5-2650Lv3 | 1.8GHz | 12 | 30MB | 65W | 9.6GT/s | 2133 |
| E5-2640v3 | 2.6GHz | 8 | 20MB | 90W | 8.0GT/s | 1866 |
| E5-2630v3 | 2.4GHz | 8 | 20MB | 85W | 8.0GT/s | 1866 |
| E5-2630Lv3 | 1.8GHz | 8 | 20MB | 55W | 8.0GT/s | 1866 |
| E5-2623v3 | 3.0GHz | 4 | 10MB | 105W | 8.0GT/s | 1866 |
| E5-2620v3 | 2.4GHz | 6 | 15MB | 85W | 8.0GT/s | 1866 |
| E5-2609v3 | 1.9GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| E5-2603v3 | 1.6GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| E5-2660v4 | 2.0GHz | 14 | 35MB | 105W | 9.6GT/s | 2400 |
| E5-2650v4 | 2.2GHz | 12 | 30MB | 105W | 9.6GT/s | 2400 |
| E5-2650Lv4 | 1.7GHz | 14 | 35MB | 65W | 9.6GT/s | 2400 |
| E5-2640v4 | 2.4GHz | 10 | 25MB | 90W | 8.0GT/s | 2133 |
| E5-2630v4 | 2.2GHz | 10 | 25MB | 85W | 8.0GT/s | 2133 |
| E5-2630Lv4 | 1.8GHz | 10 | 25MB | 55W | 8.0GT/s | 2133 |
| E5-2623v4 | 2.6GHz | 4 | 10MB | 85W | 8.0GT/s | 2133 |
| E5-2620v4 | 2.1GHz | 8 | 20MB | 85W | 8.0GT/s | 2133 |
| E5-2609v4 | 1.7GHz | 8 | 20MB | 85W | 6.4GT/s | 1866 |
| E5-2603v4 | 1.7GHz | 6 | 15MB | 85W | 6.4GT/s | 1866 |

Chipset Intel® C610 Series Chipset

One of the Intel® E5-2600v3 Processor Family following Intel® E5-2600v4 Processor Family depending on NOTE: For more information regards

NOTE: For more information regarding Intel chipsets, please see the following

model URL: http://www.intel.com/products/server/chipsets/

On System Management Chipset One of the following depending on model HPE iLO4 (Firmware HPE iLO4 2.0 or later), 2GB NAND. NOTE: Read and learn more in the iLO QuickSpecs.



Standard Features

Memory Type:

One of the **HPE SmartMemory**

following DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)

depending on DIMM Slots Available 8 (4 DIMM slots per processor, 4 channels per processor, model

1 DIMMs per channel) 256GB 8 x 32GB LRDIMM @2400MHz

Maximum Capacity

(LRDIMM)

Maximum Capacity 256GB 8 x 32GB RDIMM @2400MHz

(RDIMM)

Advanced ECC Memory Advanced ECC uses single device data correction to detect Protection and correct single and all multibit error that occurs within a

single DRAM chip.

Memory online spare mode detects a rank that is degrading Online spare

and switches operation to the spare rank.

Memory mirroring inter-socket stores a copy of memory with Mirroring mode

dynamic failover in case of failure. Once a DIMM in a mirrored set is detected as failed, the mirror failover uses its mirrored

DIMM.

Expansion Slots

One of the

depending on

following

model

| CPU1 PCIe riser | Expansion | Technology | Bus | Connecto | r Bus | For | m Factor | Notes |
|-----------------|-----------|------------|-------|-----------|--------|--------|--------------|---------------|
| slots | Slots # | | Width | Width | Numbe | er | | |
| | 1 | PCIe 3.0 | x16 | x16 | | Lo | w profile | CPU 1 |
| CPU1 | Expansion | Technology | Bus | Connector | Bus | Device | Form Factor | Notes |
| FlexibleLOM | Slots # | | Width | Width | Number | Number | | |
| riser slots | 2 | PCle 3.0 | x8 | x8 | | | Low profile | CPU1 |
| (Option 1) | 3 | Flexible | x8 | x8 | | | Flexible LOM | CPU 1 (Can |
| | | LOM | | | | | | only be used |
| | | | | | | | | for |
| | | | | | | | | FlexibleLOMs) |

NOTE: This riser is mandatory for installing FlexibleLOMs.

| CPU1 riser | Expansion | Technology | Bus | Connector | Bus | Device | Form Factor | Notes |
|------------|-----------|------------|-------|-----------|--------|--------|------------------|-------|
| PCIe slots | Slots # | | Width | Width | Number | Number | | |
| (Option 2) | 2 | PCIe 3.0 | x8 | x8 | | | Low profile slot | CPU1 |
| | 3 | PCle 3.0 | x8 | x8 | | | Full-height, | CPU1 |
| | | | | | | | half-length slot | |

NOTE: Only one of the CPU1 PCle risers can be selected in any given configuration.

NOTE: One of the CPU1 risers is mandatory for all configurations.

Storage Controller One of the following

Entry Models HPE Dynamic Smart Array B140i Controller **Base Models**

HPE Dynamic Smart Array B140i Controller NOTE: B140i provides support for up to 4 SATA drives on DL60 Gen9 and supports

RAID 0, 1, 1 + 0 & 5.

depending on model



Standard Features

Internal Storage Optical Drives **Devices**

Optional: DVD-ROM, DVD-RW None ship standard Hard Drives

One of the following

depending on model

Hard Drive Bays 4 LFF drive bays total with Optical bay

| Maximum | | CAPACITY | CONFIGURATION |
|------------------------|--------------------------|----------|---------------|
| Internal Storage | Hot Plug LFF SAS | 32.0TB | 4 x 8TB |
| One of the | Hot Plug LFF SATA | 32.0TB | 4 x 8TB |
| following depending on | Non-Hot Plug LFF SATA | 16TB | 4 x 4TB |
| model | Hot Plug LFF SATA SSD | 15.36TB | 4 x 3.84TB |

Power Supply One of the following depending on model

HPE 550W FIO Power Supply

HPE 900W Redundant Power Supply

Looking for high-efficiency power solutions at an entry-level price for your ProLiant Gen9 Essential Server? HPE Entry-Level Power Supplies offer an optimized set of features with options for both redundant and non-redundant power configurations.

The HPE 550W FIO Power Supply offers Silver-certified 80 Plus power efficiency (up to 89%) with an optimized set of features for non-redundant power configurations.

The HPE 900W AC 240VDC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. Hot-plug AC power input modules allow for better serviceability with fast and easy deployment and replacement.

System Fans One of the following depending on model

Non-redundant Redundant 1P model 3 fans 5 fans Non-redundant Redundant 2P model 4 fans 6 fans

NOTE: Redundant fan option kit (PN: 765513-B21) can be bought separately if

redundancy is required with 1P or 2P configurations.

NOTE: Additional fans required with 2P configurations are included in "-B21"

processor option kits.

Interfaces Video 1 (Vaux Support)

2 x 1GbE ports **LOM Network Ports** Micro SD Slot 1 Micro SD

NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to

plug an SD card into the SD slot while the server is powered.

4 USB ports (standard): USB

> Front: 1xUSB 2.0 std; Rear: 2xUSB 3.0 Internal: 1x USB 3.0



Standard Features

Operating <u>Microsoft Windows Server</u>

Systems and <u>Red Hat Enterprise Linux (RHEL)</u>
Virtualization SUSE Linux Enterprise Server (SLES)

Software <u>VMware</u>

Support for NOTE: For more information on the Hewlett Packard Enterprise Certified and ProLiant Servers for OS and Virtualization Software and latest listing of

software drivers available for your server, please visit our Support Matrix

at: http://www.hp.com/go/ossupport and our driver download page

http://h20566.www2.hpe.com/hpsc/swd/public/readIndex?sp4ts.oid=7500987.

Upgradeability

One of the following depending on model

Upgradeable to two processors (28 cores)

Up to 8 DIMM slots

FlexibleLOM slot for 1Gigabit or 10 Gigabit Ethernet or QDR/FDR InfiniBand

networking options

Redundant Power Supply

Redundant Fan

Industry Standard Compliance ACPI 2.0b Compliant PCIe 3.0 Compliant PXE Support

WOL Support

Microsoft® Logo certifications

USB 3.0 Support ASHRAE A3

NOTE: Supports A3 extended ambient temperature.

NOTE: Refer to technical specifications section for more details.

Graphics

Integrated Matrox G200eH2 video standard

• 1280 x 1024 (32 bpp)

• 1920 x 1200 (16 bpp)

HPE Server UEFI/Legacy ROM Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit

http://www.hpe.com/servers/uefi

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- · Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be



Standard Features

configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

Form Factor One of the following depending on

model

1U Rack form factor 4LFF version:

1.69" (4.29cm) Height x 17.11" (43.46cm) Width x 23.9" (60.70cm) Length

Embedded Management HPE Integrated

iLO)

Monitor your servers for ongoing management, service alerting, Lights-Out (HPE reporting and remote management with HPE iLO. Not available on

ML10 Gen9. Learn more at http://www.hpe.com/info/ilo.

UEFI Configure and boot your servers securely with industry standard

Unified Extensible Firmware Interface (UEFI). Learn more at

http://www.hpe.com/servers/uefi.

RESTful API RESTful API for iLO 4 is Redfish 1.0 conformance for simplified

server management such as configuration and maintenance tasks

based on modern industry standards. Learn more at

http://www.hpe.com/info/restfulapi.

Intelligent Provisioning Hassle free server and OS provisioning for 1 or few servers with

Intelligent Provisioning. Learn more at

http://www.hpe.com/servers/intelligentprovisioning.

Embedded

Hewlett Packard Enterprise embedded remote support, when used Remote Support with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more

at http://www.hpe.com/info/insightonline/explore.

NOTE: For more information, visit: http://www.hp.com/go/ilo or HPE iLO Management Engine technologies whitepaper.



Standard Features

Server utilities

Smart Update Optimize firmware and driver updates with Smart Update solutions

including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more at http://www.hpe.com/servers/smartupdatemanager.

HPE Systems HPE SIM allows you to monitor the health of your HPE ProLiant

Servers and HPE Integrity Servers, and also provides you with basic Insight

Manager support for non-HPE servers.

HPE SIM also integrates with Smart Update Manager to provide guick (HPE SIM)

and seamless firmware updates. Learn more at

http://www.hpe.com/servers/hpsim.

Scripting Tool Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux Kit and or Scripting Tools for Windows PowerShell. Learn more at Windows

PowerShell

http://www.hpe.com/servers/proliant/stkorhttp://www.hpe.com/servers/

powershell.

RESTful RESTful Interface tool is a scripting tool to provision using

RESTful API for iLO 4 to discover and deploy servers at scale. Learn Interface Tool

more at http://www.hpe.com/info/resttool.

HPE ILO Mobile

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices.

For additional information please visit: Application http://www.hpe.com/info/ilo/mobileapp.

HPE Insight Online

HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual

support agreement with Hewlett Packard Enterprise, is a personalized

dashboard for simplified tracking of IT operations and support

information from anywhere, anytime. Learn more at http://www.hpe.com/info/insightonline/explore.

Security Power-on password

> Serial interface control Administrator's password

TPM 2.0 UEFI



Standard Features

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HPE replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.



Optional Features

Embedded Management iLO Essentials

HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at

http://www.hpe.com/servers/iLO/essentials.

iLO Scale-Out

HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Emailbased Alerting and proactive notifications. For more information, visit http://www.hpe.com/servers/iLO/scale-out.

iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at http://www.hpe.com/servers/iloadvanced.

Server Management **HPE Insight** Control

HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hpe.com/info/insightcontrol.

Infrastructure

Rack and Power HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage. monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HPE Rack and Power Infrastructure.

High Performance Clusters

HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters.



Optional Features

HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects:

http://www.hp.com/techservers/clusters/ucp/index.html.

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- Data Protection and Recovery Software
 Whether you're a large enterprise or a smaller business, Hewlett Packard
 Enterprise data protection and recovery software will cost-effectively protect you
 against disaster and ensure business continuity.
- Data Archive and Migration Software
 Hewlett Packard Enterprise storage software enables you to comply with data
 retention and retrieval requirements, improve application performance, and
 reduce costs by efficiently migrating infrequently accessed or less valuable data to
 lower cost storage.
- Storage Resource Management Software (SRM)
 Hewlett Packard Enterprise storage resource management software reduces
 operational costs and provides the command and control foundation you need to
 efficiently manage and visualize your physical and virtual environments.
- Data Replication Software
 Hewlett Packard Enterprise offers array-based and host-based replication
 software for use in disaster recovery, testing, application development and
 reporting.
- Storage Device Management Software
 Maximize your investment in Hewlett Packard Enterprise storage and networking
 with software that enables hardware-specific configuration, performance tuning
 and connectivity management.
- HPE StoreVirtual VSA With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at http://www.hp.com/go/vsa1TB.

NOTE: For more information about Storage Software including QuickSpecs, please see: http://www.hp.com/go/storage/software.



Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. https://h22174.www2.hp.com/SimplifiedConfig/Index.



Service and Support

HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support. 1- IDC 2 cfHP CSC reports 2014 - 2015

Support

Recommended Basic: HPE Foundation Care NBD, three-year Support Service HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve

> hardware or software problems. http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Standard: HPE Foundation Care 24x7, three-year Support Service HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems. http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

Parts and Materials

Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product



Service and Support

QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Related Services HPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. http://www.hpe.com/ww/learn

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more http://www.hpe.com/support/hpesc

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: http://www.hpe.com/services



Pre-configured Models

| | Entry Models | Base Models | | | |
|----------------------|---|--|--|--|--|
| [SKU Number] | 830012-B21 | 833865-B21 | | | |
| Model Name | HPE ProLiant DL60 Gen9 E5- 2603v4 8GB-R B140i 4LFF NHP SATA 550W PS Entry Server | HPE ProLiant DL60 Gen9 E5- 2609v4 8GB-R B140i 4LFF SATA 550W PS Base Server | | | |
| Processor | Intel® Xeon® E5-2603v4 | Intel® Xeon® E5-2609v4 | | | |
| Number of Processors | | One | | | |
| Memory | 8GB (1x8GB Registered DIMMs STND, 2400 MHz) | 8GB (1x8GB Registered DIMMs, 2400 MHz) | | | |
| Network Controller | HPE Embedded Dual Port 3 | 61i Adapter Network Interface | | | |
| Storage Controller | HPE Dynamic | HPE Dynamic Smart Array B140i | | | |
| Hard Drive | None sh | None ship standard | | | |
| Internal Storage | 4 LFF HDD Bays (Non Hot Plug) | 4 LFF HDD Bays | | | |
| Optical Drive Bay | 1; (Optional: DV | D-ROM, DVD-RW) | | | |
| PCI-Express Slots | 3 PCIe | e 3.0 slots | | | |
| Power Supply | (1) HPE 550W | FIO Power Supply | | | |
| Fans | 3 hot swap far | ns, non-redundant | | | |
| Management | Essentials (optional), iLO Sca | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional) | | | |
| Form Factor | Rack (1U), HPE | Easy Install Rails | | | |
| Warranty | Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. | | | | |

| | Entry Models | Base Models | | |
|----------------------|--|--|--|--|
| [SKU Number] | 777394-B21 | 785836-B21 | | |
| Model Name | HP ProLiant DL60 Gen9 E5- 2603v3 4GB-R B140i 4LFF Non- hot Plug SATA 550W PS Entry Server | HP ProLiant DL60 Gen9 E5-2609v3 8GB-R B140i 4LFF SATA 550W PS Base Server | | |
| Processor | Intel® Xeon® E5-2603v3 | Intel® Xeon® E5-2609v3 | | |
| Number of Processors | | One | | |
| Memory | 4GB (1x4GB Registered DIMMs, 2133 MHz) | 8GB (1x8GB Registered DIMMs, 2133 MHz) | | |
| Network Controller | HPE Embedded Dual Port 3 | 61i Adapter Network Interface | | |
| Storage Controller | HPE Dynamic | HPE Dynamic Smart Array B140i | | |
| Hard Drive | None st | nip standard | | |
| Internal Storage | 4 LFF HDD Bays (Non Hot Plug) | 4 LFF HDD Bays | | |
| Optical Drive Bay | 1; (Optional: DV | /D-ROM, DVD-RW) | | |
| PCI-Express Slots | 3 PCI | e 3.0 slots | | |
| Power Supply | (1) HPE 550W | (1) HPE 550W FIO Power Supply | | |
| Fans | 3 hot swap far | ns, non-redundant | | |
| Management | Essentials (optional), iLO Sca | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional) | | |



Pre-configured Models

| Form Factor | Rack (1U), HPE Easy Install Rails |
|-------------|---|
| Warranty | Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. |

| Country Code | xx1 = B21 | Worldwide |
|--------------|-----------|-----------|
| Key | xx1 = 291 | Japan |
| | xx1 = AA1 | PRC |



Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- 1. Factory Integrated Models must start with a CTO Server.
- 2. FIO indicates that this option is only available as a factory installable option.
- 3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- 4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| [Chassis] | HP ProLiant DL60 Gen9 Non-hot Plug 4LFF Configure-to-order Server | HP ProLiant DL60 Gen9 4LFF Configure-to-order Server | | |
|--------------------|---|---|--|--|
| SKU Number | 777404-B21 | 777403-B21 | | |
| Processor | 2 (optional) x HPE S | Smart Socket Guides | | |
| DIMM Slots | 8 DIMM slots for RDIMM, | LRDIMM DDR4 Memory | | |
| Storage Controller | HPE Dynamic Smart Array B140i | | | |
| PCle | 3 PCle | 3.0 slots | | |
| Drive Cage | 4LFF Non Hot Plug | 4LFF Hot Plug | | |
| Network Controller | HPE Embedded Dual Port 361i Adapter Network Interface | | | |
| Fans | 3 hot swap fans, non-redundant | | | |
| Management | iLO Management (standard), Intelligent Provisioning (standard) | | | |
| USB | 1 front, 1 internal, 2 rear | | | |
| Ears | HPE Thum | bscrew Ears | | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors Select one or two processors from Core options-Processor section below.

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, $2 = \text{number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, <math>x = L$ for low power SKUs and v# (not yet designated) = version number.

HPE Memory

Select one or more memory from Core options-Memory section below,

- LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.
- HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9
- If only one processor is installed, only half of the total DIMM slots are available.



Configuration Information - Factory Integrated Models

- When populating with two processors all DIMM slots are available.
- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: http://www.hp.com/go/proliant-energy-efficient.
- Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: http://www.hp.com/go/ddr4config.

HPE Power Supplies

Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.
- Mixing of power supplies in the same server is not supported. All power supplies
 must be of the same input voltage, output rating, and efficiency rating. If nonmatching power supplies are installed, you may receive an error message and/or
 experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HPE Unique Options

Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Drives

Select one or more drives from Core options-HPE Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

HPE Flexible LOM

Select a FlexibleLOM from Core options-Networking section below,

- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/qo/ProLiantNICs.

HPE Networking Select a standup NIC adapter from Core options-Networking section below,

- Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is



Configuration Information - Factory Integrated Models

HPE I/O Expansion Options required per each adapter.

Select one or more Riser Kit options from Core options section below.

- This section may contain FIO options, please see HPE I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option.

Select one or more Fan Kits from Core options section below.

- This section may contain FIO options, please see HPE Cooling Options section below
- FIO indicates that this option is only available as a factory installable option.

HPE Rail Kits

HPE Cooling

Options

Select one type of rail kit from Additional options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See Hewlett Packard Enterprise Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

| • | nesentative for additional information. | |
|--------------|---|--------------|
| HPE Unique | HP DL60/120 Gen9 CPU1 Riser Kit | 765508-B21 |
| Options | HP DL60/120 Gen9 FlexibleLOM Riser Kit | 765509-B21 |
| | HP DL60/120 Gen9 Full Height Half Length PCIe Riser Kit | 765510-B21 |
| | HP AHCI-Enable FIO Setting | 801845-B21 |
| | NOTE: This needs to be selected when Advanced Host Controller | |
| | Interface mode is required on B140i controller. | |
| HPE Processo | orsEntry Processors - E5-2600v4 series Processors | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4- | 803053-B21 |
| | core/10MB/85W) Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4- | 803053-L21 |
| | core/10MB/85W) FIO Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8- | 803054-B21 |
| | core/20MB/85W) Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8- | 803054-L21 |
| | core/20MB/85W) FIO Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8- | 803055-B21 |
| | core/20MB/85W) Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8- | 803055-L21 |
| | core/20MB/85W) FIO Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6- | 803056-B21 |
| | core/15MB/85W) Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6- | 803056-L21 |
| | core/15MB/85W) FIO Processor Kit | |
| | HPE DL60 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14- | 803057-B21 |
| | core/35MB/65W) Processor Kit | 000057104 |
| | HPE DL60 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14- | 803057-L21 |
| | core/35MB/65W) FIO Processor Kit | 0020E0 D04 |
| | HPE DL60 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10- | 803058-B21 |
| | core/25MB/55W) Processor Kit | 002050 24 |
| | HPE DL60 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) FIO Processor Kit | 803058-L21 |
| | Entry Processors - E5-2600v3 series Processors | |
| | HP DL60 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6- | 765536-B21 |
| | core/15MB/85W) Processor Kit | 700000 B21 |
| | HP DL60 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6- | 765536-L21 |
| | core/15MB/85W) FIO Processor Kit | . 00000 LE ! |
| | HP DL60 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6- | 765538-B21 |
| | core/15MB/85W) Processor Kit | |
| | HP DL60 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6- | 765538-L21 |
| | core/15MB/85W) FIO Processor Kit | |
| | Dece December FE 0000-0 contact December | |



Base Processors - E5-2600v3 series Processors

| HP DL60 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit | 765540-B21 |
|--|------------|
| HP DL60 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit | 765540-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit | 765541-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit | 765541-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit | 765542-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit | 765542-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit | 765545-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit | 765545-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit | 779928-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit | 779928-L21 |
| Performance Processors - E5-2600v4 series Processors HPE DL60 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit | 803049-B21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit | 803049-L21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit | 803050-B21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit | 803050-L21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit | 803051-B21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit | 803051-L21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit | 803052-B21 |
| HPE DL60 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) FIO Processor Kit | 803052-L21 |
| Performance Processors - E5-2600v3 series Processors HP DL60 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10- | 765543-B21 |
| core/25MB/105W) Processor Kit HP DL60 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10- core/25MB/105W) FIO Processor Kit | 765543-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit | 765544-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit | 765544-L21 |
| HP DL60 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit | 765551-B21 |
| HP DL60 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit | 765551-L21 |
| | |



| Core Options | | |
|-----------------------|---|--------------------------|
| HPE Memory | Registered DIMMs (RDIMMs) for E5-2600v3 Series HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 | 726717-B21 |
| | Registered Memory Kit HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 | 803026-B21 |
| | Registered Standard Memory Kit HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| | HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 759934-B21 |
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit | 803028-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 728629-B21 |
| | Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726720-B21 |
| | HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726722-B21 |
| | Registered DIMMs (RDIMMs) for E5-2600v4 Series HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805347-B21 |
| | HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit | 851353-B21 |
| | HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| | HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 836220-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805351-B21 |
| | Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Registered Memory Kit | 805353-B21 |
| HPE Optical Drives | HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive | 726536-B21 726537-B21 |
| HPE Drives | SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 765424-B21 |
| | HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737394-B21 |
| | HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737261-B21 |
| | HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793669-B21 |
| | HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives | 793671-B21 |



| HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818367-B21 |
|--|------------|
| HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 818365-B21 |
| HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 761477-B21 |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765253-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765255-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives | 793665-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive | 793667-B21 |
| HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 861676-B21 |
| HPE 4TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive | 861678-B21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 753874-B21 |
| HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive | 819203-B21 |
| 6G SATA SC Hot Plug LFF 7.2K (3.5-inch) Standard Drives | |
| HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive | 858596-B21 |
| HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive | 858594-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) SC 512e Midline Drives HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr | 819201-B21 |
| Warranty Hard Drive | 0.0201 021 |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765259-B21 |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive | 765257-B21 |
| | |



| SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives | |
|---|------------|
| HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr | 801888-B21 |
| Warranty Hard Drive HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr | 628065-B21 |
| Warranty Hard Drive HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr | 801886-B21 |
| Warranty Hard Drive HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr | 659339-B21 |
| Warranty Hard Drive HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801884-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659337-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801882-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659341-B21 |
| 12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 762272-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Driv | es |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 Solid State Drives | |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756660-B21 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive | 756639-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718183-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 718171-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives | |



| LID COOOD CO OATA Value Fortunes en LEE O. E. in CO. Onwester | 704045 D04 |
|---|-------------------------|
| HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764945-B21 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter | 764943-B21 |
| ENT Value 3yr Wty M1 Solid State Drive | 104945-021 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter | 764941-B21 |
| ENT Value 3yr Wty M1 Solid State Drive | 701011 021 |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter | 764939-B21 |
| ENT Value 3yr Wty M1 Solid State Drive | |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid | 804616-B21 |
| State Drive | |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid | 804628-B21 |
| State Drive | |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid | 804634-B21 |
| State Drive | |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid | 832417-B21 |
| State Drive | |
| 12G SAS Hot Plug SmartDrive LFF (3.5-inch) Midline 512e Helium Drives HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr | |
| Warranty Hard Drive | 793703-B21 |
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr | 793699-B21 |
| Warranty Hard Drive | 733033-021 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives | |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr | 789147-B21 |
| Wty Solid State Drive | |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid | 804578-B21 |
| State Drive | |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty | 804584-B21 |
| Solid State Drive | |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty | 804590-B21 |
| Solid State Drive | 004E06 D04 |
| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty | 804602-B21 |
| Solid State Drive | 00 1 002-D21 |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid | 804608-B21 |
| State Drive | |
| 6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD | |
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr | 816933-B21 |
| Wty Solid State Drive | |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr | 816923-B21 |
| Wty Solid State Drive | |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr | 816913-B21 |
| Wty Solid State Drive | 040000 D04 |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr | 816903-B21 |
| Wty Solid State Drive | 916902 D21 |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816893-B21 |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr | 816883-B21 |
| Wty Solid State Drive | 2.0000 DE1 |
| 6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD | |
| · , , , , , , , , , , , , , , , , , , , | |



Core Options

| HP 1.92 | TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty | 817015-B21 |
|-----------|---|----------------|
| | ate Drive | |
| HP 9600 | GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty | 816999-B21 |
| Solid Sta | ate Drive | |
| HP 4800 | GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty | 816989-B21 |
| | ate Drive | |
| | GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty | 816979-B21 |
| | ate Drive | 0.1.0000 D.0.1 |
| | GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty | 816969-B21 |
| | ate Drive | Drive o |
| | A Hot Plug with SmartDrive LFF (3.5-inch) Midline 512e Helium [6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr | 793695-B21 |
| | y Hard Drive | 793093-021 |
| | 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr | 793683-B21 |
| | y Hard Drive | |
| Hard Dr | ve Blank Kits | |
| HP Larg | e Form Factor Hard Drive Blank Kit | 666986-B21 |
| M.2 SSI | | |
| | 120GB Value Endurance Solid State M.2 Enablement Kit | 777894-B21 |
| | ant ML/DL Servers | |
| | GB Value Endurance Solid State M.2 Enablement Kit for | 788028-B21 |
| | ML/DL Servers | 005000 504 |
| _ | 0/120 Gen9 M.2 Cable Kit | 805283-B21 |
| NOTE: I | M.2 drives go in PCIe slot and use B140i SATA controller only. | |

HPE Networking 1 Gigabit Ethernet adapters

| 1 Olgabit Ethernet adapters | |
|--|------------|
| HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| HP Ethernet 1Gb 4-port 366T Adapter | 811546-B21 |
| HP Ethernet 1Gb 2-port 361T Adapter | 652497-B21 |
| HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |
| 10 Gigabit Ethernet adapters | |
| HP Ethernet 10Gb 2-port 530T Adapter | 656596-B21 |
| HP Ethernet 10Gb 2-port 561T Adapter | 716591-B21 |
| HP Ethernet 10Gb 2-port 530SFP Adapter | 652503-B21 |
| HP Ethernet 10Gb 2-port 546SFP+ Adapter | 779793-B21 |
| HPE Ethernet 10Gb 2-port 562SFP+ Adapter | 727055-B21 |
| | |

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. See cables/options below.

| Flex | (ible | LC | M | Α | da | pter | S |
|------|-------|----|---|---|----|------|---|
| | | _ | | | | | _ |

HP Ethernet 10Gb 2-port 560SFP+ Adapter

| 1 loxible 2 o m / taaptole | |
|---|------------|
| HP FlexFabric 10Gb 2-port 533FLR-T Adapter | 700759-B21 |
| HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter | 700751-B21 |
| HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter | 665243-B21 |
| HP Ethernet 10Gb 2-port 561FLR-T Adapter | 700699-B21 |
| HP Ethernet 1Gb 4-port 366FLR Adapter | 665240-B21 |
| HP Ethernet 1Gb 4-port 331FLR Adapter | 629135-B22 |
| HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter | 779799-B21 |
| HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter | 727054-B21 |
| | |

NOTE: FlexibleLOM riser kit (P/N:76550765509-B219-B21) is required when any FlexibleLOM is selected.



665249-B21

| Core | <i>,</i> , | nti | ~ r | \sim |
|------|------------|-----------|--------------|--------|
| | | | | |
| | \sim | \sim LI | \mathbf{v} | 10 |
| | | | | |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.

HPE InfiniBand

HP InfiniBand FDR 2-port 545QSFP Adapter 702211-B21 HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter 764284-B21 NOTE: Please see the HPE InfiniBand Options for HP ProLiant and Integrity Servers

QuickSpecs

for additional information.

HPE I/O Expansion **Options**

HP DL60/120 Gen9 Full Height Half Length PCIe Riser Kit 765510-B21 HP DL60/120 Gen9 FlexibleLOM Riser Kit 765509-B21 HP DL60/120 Gen9 CPU1 Riser Kit 765508-B21

HPE Power Supplies

HPE Entry-Level Power Supplies HP 550W FIO Power Supply Kit

730941-B21

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: Supports Silver-level efficiency (89%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

HPE 900W AC 240VDC Power Input Module FIO Kit

828734-B21

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: RPS Backplane is mandatory to be chosen with this power

input module.

HPE 900W AC 240VDC RPS Power Backplane FIO Kit

828735-B21

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: This RPS backplane is mandatory to be chosen along with

900W RPS input module.

HPE 900W AC 240VDC Power Input Module

775595-B21

NOTE: This part number can only be bought standalone and is for

field integration only.

NOTE: RPS Backplane is mandatorily needed with this power input

module.

HPE 900W AC 240VDC RPS Power Backplane

814835-B21

NOTE: This part number can only be bought standalone and is for

field integration only.

NOTE: This RPS backplane is mandatorily needed with 900W RPS

input module.



Core Options

HPE 900W AC 240VDC Redundant Power Supply Kit

820792-B21

NOTE: This Redundant Power supply kit includes 2 power supply input module and 1 backplane kit.

NOTE: This part number is both factory installed option and field integrable option.

NOTE: This Power supply supports both 100-240V AC and 240V DC.

NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE

Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21).

NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.

NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC

Power Input Module.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

http://www.hp.com/go/hppoweradvisor.

HPE Cooling Options

HP DL60/120 Gen9 Redundant Fan Kit

765513-B21

NOTE: Includes two fans and is required to move from non-redundant to redundant configurations.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlet Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for addi information.

HPE Insight HPE Insight Control

Software HPE Insight Control including 1yr 24x7 Technical Support and C6N27A

Updates 1-server LTU

HPE Insight Control including 1yr 24x7 TSU E-LTU C6N28ABE HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-C6N36A

bundle Single Server FIO LTU

HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-C6N36ABE

bundle FIO E-LTU

.....

HPE Insight Management Media Kit C6N31A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service. NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered

separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: For additional license options please see the QuickSpecs at: http://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123391.

| Embedded | HPE iLO Advanced | |
|------------|--|-------------|
| Management | HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU | 512485-B21 |
| | · | DDEOEA |
| | HPE iLO Advanced including 3yr 24x7 Tech Support and Updates | BD505A |
| | 1-server LTU | |
| | HPE iLO Advanced including 1yr 24x7 Technical Support and | E6U59ABE |
| | Updates E-LTU | |
| | HPE iLO Advanced including 3yr 24x7 Technical Support and | E6U64ABE |
| | Updates E-LTU | |
| | HPE iLO Essentials | |
| | HPE iLO Essentials including 3yr 24x7 Technical Support and | E6U61ABE |
| | Updates E-LTU | 2000 11 122 |
| | • | BD774A |
| | HPE iLO Essentials including 3yr 24x7 Tech Support and Updates | DD774A |
| | 1-server LTU | |
| | HPE iLO Essentials including 1yr 24x7 Tech Support and Updates | BD775A |
| | 1-server LTU | |
| | HPE iLO Essentials including 1yr 24x7 Technical Support and | E6U62ABE |
| | Undates F LTU | |

Updates E-LTU

HPE iLO Scale-out



| ا م ما دا: اه اه ۸ | 0-4: |
|--------------------|----------------|
| Additional | Options |

| Additional Option | 0115 | |
|-------------------|--|----------|
| | HPE iLO Scale-Out 3yr 24x7 Tech Support and Updates Flexible Quantity LTU | BD776A |
| | HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU | BD776AAE |
| | HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Tracking LTU | BD777A |
| | HPE iLO Scale-Out 1yr 24x7 Tech Support and Updates Flexible Quantity LTU | BD778A |
| | HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU | BD778AAE |
| | HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Tracking LTU | BD779A |
| HPE Converged | HPE OneView Advanced (with HPE iLO Advanced) | |
| Infrastructure | HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| Management | HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |
| Software | HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |
| | HPE OneView without iLO Advanced | |
| | HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| | HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |
| | HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU | P8B31A |
| | HPE OneView Physical Media Kit LTU | E5Y37A |
| | HPE Operations Analytics for HPE OneView LTU | K8G29A |
| | HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU | P8B25A |
| | HPE Operations Analytics for HPE OneView E-LTU | K8G29AAE |
| | NOTE: Full licenses of HPE OneView Advanced also provide the | |
| | right-to-use HPE Insight Control without additional charge. | |
| | NOTE: Server provisioning (via 'HPE Insight Control server | |
| | provisioning') is licensed as part of HPE OneView Advanced and | |
| | provides multi-server OS and driver provisioning. Media kit | |

#BD883A can be ordered for a physical copy of this software (USB flash drive).

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at:

http://www.hp.com/go/oneview.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.



| Additional | Options |
|------------|---------|
| | |

| Additional Opt | 10113 | | |
|----------------------------|--|--|--|
| HPE Security | HP Trusted Platform Module 2.0 Kit NOTE: HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants. NOTE: HPE Gen9 servers purchased earlier may need the latest firmware update to be compatible with the TPM 2.0 Option. NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module. | 745823-B21 | |
| | HP Trusted Platform Module Option NOTE: The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2 version. Compatible server platforms include Gen8 and Gen9 servers NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module. | 488069-B21 | |
| | HP 1U Security Bezel Kit NOTE: Quick Release Ear option kit (P/N 777324-B21) is required for installing security bezel. | 664918-B21 | |
| | HP DL60 Gen9 Quick Release Ear FIO Kit HP DL60 Gen9 Thumbscrew Ear FIO Kit | 777324-B21 787218-B21 | |
| HPE Storage Controllers | SAS Controllers HPE Smart Array Controllers | | |
| | HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller NOTE: Includes the HPE Smart Storage Battery. | 820834-B21 | |
| | HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller | 726821-B21 | |
| | HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 | |
| | HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller | 761872-B21 | |
| | NOTE: Includes the HPE Smart Storage Battery. HPE Smart Host Bus Adapters | | |
| | HP H240 12Gb 2-ports Int Smart Host Bus Adapter | 726907-B21 | |
| | HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter | 761873-B21 | |
| | HP H241 12Gb 2-ports Ext Smart Host Bus Adapter HPE Cable Options | 726911-B21 | |
| | HP DL60/120 Gen9 4LFF Smart HBA H240 SAS Cable Kit HP DL60/120 Gen9 4LFF Smart Array P440 SAS Cable Kit HP DL60/80/120 Gen9 4LFF Cable FIO Kit | 777385-B21 777382-B21 777331-B21 | |
| | NOTE: One of the above cables is required to be selected depending on the combination of chassis and storage controller. Cable option kit descriptions include the right chassis and storage controller names. | | |
| | NOTE: FIO indicates that this option is only available as a factory insta Please select FIO option if you want the option to be factory installed. | liable option. | |

NOTE: NHPE server chassis (Mod-x) includes SATA cables required to connect drives to embedded B140i SATA controller.

Optional Software



Additional Options

| HPE SmartCache No Media 24x7 Technical Support 1-server LTU | D7S26A |
|---|----------|
| HPE SmartCache No Media 24x7 Technical Support Flexible LTU | D7S27A |
| HPE SmartCache No Media 24x7 Technical Support E-LTU | D7S27AAE |

NOTE: HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

NOTE: HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers

727258-B21

NOTE: This option is mandatorily required with HPE Smart Array controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array controllers.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HPE tape backup products see: http://www.hp.com/go/ebs. NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

| T D! | |
|-------------|----|
| | _ |
| Tape Drive: | ٠. |

| HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive HPE StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive HPE StoreEver LTO-6 Ultrium 6250 External Tape Drive HPE StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive HPE StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive | BB874A EH964A EH970A EH958B EH900B |
|---|--|
| HPE StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive | EH920B |
| HPE StoreEver LTO-3 Ultrium 920 SAS External Tape Drive | EH848B |
| SAS Rack-Mount Tape Solutions | |
| HPE StoreEver LTO-6 Ultrium 6250 Tape Drive in a 1U Rack Mount | C0L99A |
| Kit | |
| HPE StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in a 1U Rack Mount Kit | EJ014B |
| HPE StoreEver LTO-4 Ultrium 1760 SAS (1) in a 1U Rack Mount Kit | EH946C |
| HPE StoreEver 1U SAS Rack Mount Kit | AE459B |
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External | K2R09A |
| Fanout 2m Cable | |
| HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External | K2R10A |
| Fanout 4m Cable | |
| HPE DAT Autoloader | |
| HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape | C0H19A |
| Autoloader | |
| HPE MSL2024 Tape Library | |
| HPE StoreEver MSL2024 0-drive Tape Library | AK379A |
| HPE MSL4048 Tape Library | A16004A |
| HPE StoreEver MSL4048 0-drive Tape Library | AK381A |
| HPE StoreEver MSL6480 | OLICOC 4 |
| HPE StoreEver MSL6480 Scaleable Expansion Module | QU626A |
| HPE StoreEver MSL6480 Scalable Base Module | QU625A |



Additional Options

| HPE | Disk |
|------|------|
| Back | up |

HPE RDX Removable Disk Backup System HP RDX+ 1TB External Backup System B7B69B HP RDX+ 500GB External Backup System B7B66B HP RDX 2TB USB3.0 External Disk Backup System E7X53B HPE RDX+ 3TB USB 3.0 External Disk Backup System P9L72A HPE RDX 3TB USB 3.0 Internal Disk Backup System P9L71A HP D3700 Enclosure **QW967A** HP D3600 Enclosure **QW968A** HP RDX+ External Docking System C8S07B

NOTE: For the complete range of RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HPE disk backup products see:

http://www.hp.com/storage/SPOCK.

NOTE: Please see the <u>HPE RDX Removable Disk Backup System QuickSpecs</u> for additional part numbers, technical specifications, and additional information.

| HPE StoreOnce Backup systems | |
|--------------------------------|--------|
| HPE StoreOnce 3100 8TB System | BB913A |
| HPE StoreOnce 3540 24TB System | BB914A |
| HPE StoreOnce 5100 48TB System | BB915A |
| HPE StoreOnce 3520 12TB System | BB922A |

HPE Storage Options

NOTE: These adapters are only supported with Windows Server 2012 R2 operating system as of now. Support for other operating systems will follow later.

| Emulex Fibre Channel HBAs | |
|--|--------|
| HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter | AJ762B |
| HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter | AJ763B |
| HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus | C8R38A |
| Adapter | |
| HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus | C8R39A |
| Adapter | |

| QLogic Fibre Channel HBAs | |
|--|--------|
| HP 81Q 8Gb 1-port PCle Fibre Channel Host Bus Adapter | AK344A |
| HP 82Q 8Gb 2-port PCle Fibre Channel Host Bus Adapter | AJ764A |
| HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host | QW971A |
| Bus Adapter | |

| HP StoreFabric SN1000Q 16GB 2-port PCle Fibre Channel Host | QW972A |
|--|--------|
| Bus Adapter | |

| Converged | Motwork | Adaptor |
|-----------|---------|---------|
| Converged | network | Adapter |

| HP StoreFabric CN1200E 10Gb Converged Network Adapter | E7Y06A |
|--|--------|
| HP StoreFabric CN1100R Dual Port Converged Network Adapter | QW990A |
| HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged | N3U51A |
| | |

Network Adapter

HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged N3U52A

Network Adapter



| Additional C | Options |
|--------------|---------|
| HPE Disk | Dis |

| Additional Options | | | | |
|--------------------|--|------------------|--|--|
| HPE Disk | Disk Enclosures | | | |
| | s HP D6000 Dual I/O Module Disk Enclosure | QQ695A | | |
| Clorage Cycloni | HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB | E7W30A | | |
| | Bundle | LIVVOOR | | |
| | HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB | E7W31A | | |
| | Bundle | LIVVJIA | | |
| | HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB | QQ697A | | |
| | Bundle | QQUETA | | |
| | HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB | QQ698A | | |
| | Bundle | QQ090A | | |
| | | 006004 | | |
| | HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB | QQ699A | | |
| | Bundle | 007004 | | |
| | HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB | QQ700A | | |
| | Bundle | E7\4(00 A | | |
| | HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB | E7W32A | | |
| | Bundle | | | |
| | HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL | M0T59A | | |
| | HDD 560TB Bundle | | | |
| | HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL | M0T57A | | |
| | HDD 420TB Bundle | | | |
| | HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL | M0T58A | | |
| | HDD 280TB Bundle | | | |
| | | | | |
| HPE Data | HPE Advanced Series Racks | | | |
| Center Racks | HPE 11648 1075mm Pallet Universal Rack | H6J87A | | |
| | HPE 11648 1075mm Shock Universal Rack | H6J88A | | |
| | HPE 11642 1075mm Pallet Universal Rack | H6J65A | | |
| | HPE 11642 1075mm Shock Universal Rack | H6J66A | | |
| | HPE 11642 1200mm Pallet Universal Rack | H6J67A | | |
| | HPE 11642 1200mm Shock Universal Rack | H6J68A | | |
| | HPE 11636 1075mm Pallet Universal Rack | H6J77A | | |
| | | H6J77A H6J78A | | |
| | HPE 11636 1075mm Shock Universal Rack | | | |
| | HPE 11622 G2 1075mm Shock Universal Rack | H6J83A | | |
| | HPE 11622 G2 1075mm Shock Universal Rack | H6J84A | | |
| | HPE 11614 1075mm Shock Universal Rack | H6J82A | | |
| | NOTE: Please see the HPE Advanced Series Racks QuickSpecs | | | |
| | for information on additional racks options and rack specifications. | | | |
| | HPE Enterprise Series Racks | | | |
| | HPE 647 1075mm Pallet Intelligent Series Rack | BW911A | | |
| | HPE 647 1075mm Shock Intelligent Series Rack | BW912A | | |
| | HPE 647 1200mm Pallet Intelligent Series Rack | BW913A | | |
| | HPE 647 1200mm Shock Intelligent Series Rack | BW914A | | |
| | HPE 642 1075mm Pallet Intelligent Series Rack | BW903A | | |
| | HPE 642 1075mm Shock Intelligent Series Rack | BW904A | | |
| | HPE 642 1200mm Pallet Intelligent Series Rack | BW907A | | |
| | HPE 642 1200mm Shock Intelligent Series Rack | BW908A | | |
| | HPE 636 1075mm Pallet Intelligent Series Rack | BW895A | | |
| | HPE 636 1075mm Shock Intelligent Series Rack | BW896A | | |
| | HPE 842 1075mm Pallet Intelligent Series Rack | BW917A | | |
| | HPE 842 1075mm Shock Intelligent Series Rack | BW918A | | |
| | | DAABLOW | | |
| | NOTE: Please see the HPE Enterprise Series Racks QuickSpecs | | | |
| | for information on additional racks options and rack specifications. | | | |



Additional Options

| | HPE Standard Series Rack HPE V142 1075mm deep Pallet 100 series Rack NOTE: Please see the HPE Standard Series Racks QuickSpecs for information on additional racks options and rack specifications. | AF046A |
|---------------------------|---|------------|
| Distribution Units (PDUs) | HPE Basic Power Distribution Units (PDU) HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU | H5M54A |
| | HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU | H5M56A |
| | HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU | H5M55A |
| | HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU | H5M57A |
| | HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU | H5M58A |
| | HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU | H5M68A |
| | HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU | H5M61A |
| | HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M59A |
| | HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU | H5M70A |
| | HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU | H5M60A |
| | HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU | H5M71A |
| | HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU | H5M75A |
| | HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU | H5M63A |
| | HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | H5M64A |
| | HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M62A |
| | HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU | H5M72A |
| | HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU | H5M73A |
| | HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU | H5M67A |
| | HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU | 252663-D71 |
| | HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU | 252663-D74 |
| | HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU | 252663-D75 |
| | HPE Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (4) C19/Horizontal INTL Core Only PDU | 252663-B33 |
| | HPE Basic Modular 9.2kVA/60309 63A 3-wire 40A/230V Outlets (4) C19/Horizontal INTL PDU | 252663-B34 |



Additional Options

| HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF512A |
|--|---------------------|
| HPE Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU | AF513A |
| HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF519A |
| HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF511A |
| HPE Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU | AF518A |
| HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer NOTE: Please see the HPE Basic Power Distribution Units (PDU) QuickSpe for information on additional options and product specifications. HPE Metered Power Distribution Units (PDU) | H3X09A <u>cs</u> |
| HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU | D9N43A |
| HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU | D9N46A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU | D9N44A |
| HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU | D9N45A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU | G9Z05A |
| HPE Metered 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/Vertical INTL PDU | G9Z06A |
| HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU | D9N47A |
| HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU | D9N48A |
| HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU | D9N51A |
| HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3)5-20R/Vertical NA/JP PDU | D9N52A |
| HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | D9N53A |
| HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU | D9N55A |
| HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU | D9N49A |
| HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (32) C13 (4) C19/Vertical INTL PDU | D9N50A |
| HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU | D9N57A |
| HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N58A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU | D9N61A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N62A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU | D9N54A |
| | |



Additional Options

| LIDE M. (LODI, 47 OL) (A (00000 000 A | DONIEGA |
|--|------------------|
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets | D9N59A |
| (12) C13 (12) C19/Vertical NA/JP PDU HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets | G9Z07A |
| (12) C13 (12) C19/Vertical NA/JP PDU | 0020171 |
| HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF- | D9N63A |
| 203P-HP/Vertical NA PDU | |
| HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (30) C13 | D9N56A |
| (3) C19/Vertical INTL PDU | |
| HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 | D9N60A |
| (12) C19/Vertical INTL PDU | |
| HPE Metered 3Ph 22kVA/60309 5-wire WT 32A/230V Outlets (12) | G9Z08A |
| C13 (12) C19/Vertical INTL PDU | |
| HP Environmental Sensor for Remote Monitored and Managed | E2D53A |
| PDUs | |
| NOTE: Please see the HPE Metered Power Distribution Units (PDU) QuickS | <u>pecs</u> |
| for information on additional options and product specifications. | |
| HPE Intelligent Power Distribution Unit (PDU) HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) | AF520A |
| C19/Horizontal NA/JP PDU | AF3ZUA |
| HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) | AF521A |
| C19/Horizontal NA/JP PDU | AI 32 IA |
| HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) | AF522A |
| C19/Horizontal NA/JP PDU | , 022 , . |
| HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V | AF523A |
| (6) C19/Horizontal NA/JP PDU | |
| HPE Intelligent Modular 3Ph 11kVA/L22-20P 16A/240V Outlets (6) | AF900A |
| C19/Horizontal NA/JP PDU | |
| HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V | AF901A |
| (6) C19/Horizontal NA/JP PDU | |
| HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) | AF525A |
| C19/Horizontal INTL PDU | A E E O C A |
| HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU | AF526A |
| HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets | AF527A |
| (6) C19/Horizontal INTL PDU | AI 321A |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire | AF535A |
| 48A/208V (12) C19/Horizontal NA/JP PDU | 711 00071 |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire | AF537A |
| 24A/240V (12) C19/Horizontal NA/JP PDU | |
| HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets | AF538A |
| (12) C19/Horizontal INTL PDU | |
| HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 | AF531A |
| (6) C19/Horizontal NA/JP PDU | |
| HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets | AF532A |
| (20) C13 (6) C19/Horizontal NA/JP PDU | 455004 |
| HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets | AF533A |
| (6) C19/Horizontal NA/JP PDU | Λ <i>ΓΕ</i> Ω4Λ |
| HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU Kit | AF534A |
| HP 5xC13 Intelligent PDU Extension Bar G2 Kit | AF547A |
| HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension | AF528A |
| Bar | AI 320A |
| NOTE: Please see the HPE Intelligent Power Distribution Unit (PDU) QuickS | necs |
| TO 12.1 10000 000 the in Emissing in the Mor Distribution Office DO) Quicko | 5555 |



Additional Options

| and the second second | 1,000 | 4.0 | 100 | 1.00 |
|-----------------------|-----------------|------------|-----------|----------------|
| for information | on additional o | ptions and | product s | pecifications. |

| HPE Metered and Switched Power Distribution Units (PDU) | 1100404 |
|--|---------|
| HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5-20R /Vertical NA/JP PDU | H8B48A |
| HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V | H8B49A |
| Outlets (7) C13 (1) C19/Vertical WW PDU | |
| HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 | H8B50A |
| (4) C19/Vertical NA/JP PDU | |
| HPE Metered Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) | H8B51A |
| C13 (4) C19/Vertical INTL PDU | |
| HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) | H8B52A |
| C13 (6) C19/Vertical NA/JP PDU | |
| HPE Metered Switched 3Ph 8.6kVA/L2190-30P 24A/208V Outlets | H8B53A |
| (23) C13 C19 (1) 520R/Vertical NA/JP PDU | |
| HPE Metered Switched 3Ph 11kVA/60309 5-wire 16A/230V Outlets | H8B54A |
| (21) C13 (3) C19/Vertical INTL PDU | |
| HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets | H8B55A |
| (12) C13 (12) C19/Vertical NA/JP PDU | |
| HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V | H8B56A |
| Outlets (12) C13 (12) C19/Vertical NA/JP PDU | |
| NOTE: Please see the HPE Metered and Switched Power Distribution Units (| (PDU) |

NOTE: Please see the HPE Metered and Switched Power Distribution Units (PDU)

QuickSpecs

for information on additional options and product specifications.

NOTE: To learn more, please visit the <u>HPE Uninterruptible Power Systems (UPS) web page</u>.

| HPE Rack | HPE Location Discovery Services | |
|-----------------|--|--------|
| Mount Consoles, | HP Location Discovery Services LCD8500 Kit | TL052A |
| KVM Switches, | NOTE: Please see the HPE Location Discovery Services | |
| and Keyboards | QuickSpecs for information on additional options and product | |
| | specifications. | |
| | HPE Rack Mount Consoles | |
| | HP LCD8500 1U US Rackmount Console Kit | AF630A |
| | HP LCD8500 1U UK Rackmount Console Kit | AF631A |
| | HP LCD8500 1U DE Rackmount Console Kit | AF632A |
| | HP LCD8500 1U FR Rackmount Console Kit | AF633A |
| | HP LCD8500 1U JP Rackmount Console Kit | AF642A |
| | HP LCD8500 1U RU Rackmount Console Kit | AF643A |
| | HP LCD8500 1U INTL Rackmount Console Kit | AF644A |
| | HP LCD8500 1U US TAA Rackmount Console Kit | AF645A |
| | HPE KVM Switches | |



Additional Options

| HP 0x2x16 G3 KVM Console Switch | AF652A |
|---|----------------------|
| HP TAA 0x2x16 G3 KVM Console Switch | AF653A |
| HP USB Remote Access Key for G3 KVM Console Switches | AF650A |
| HP KVM Console USB Interface Adapter | AF628A |
| HPE KVM Console USB 8-pack Interface Adapter | AF655A |
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC | AF618A |
| Software | |
| HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC | AF619A |
| Software | |
| HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter | AF629A |
| HP 1x4 USB/PS2 KVM Console Switch | AF611A |
| HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC | AF620A |
| Software | |
| HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC | AF621A |
| Software | |
| HP 0x1x8 G3 KVM Console Switch | AF651A |
| HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC | AF622A |
| Software | |
| HPE KVM Console USB/Display Port Interface Adapter | AF654A |
| HPE USB Keyboard and Mouse | |
| HP USB BFR with PVC Free US Keyboard/Mouse Kit | 631341-B21 |
| HP USB BFR with PVC Free UK Keyboard/Mouse Kit | 631344-B21 |
| HP USB BFR with PVC Free FR Keyboard/Mouse Kit | 631346-B21 |
| HP USB BFR with PVC Free ES Keyboard/Mouse Kit | 631348-B21 |
| HP USB BFR with PVC Free DE Keyboard/Mouse Kit | 631358-B21 |
| HP USB BFR with PVC Free JP Keyboard/Mouse Kit | 631360-B21 |
| HP USB BFR with PVC Free IT Keyboard/Mouse Kit | 631362-B21 |
| HP USB BFR with PVC Free CN Keyboard/Mouse Kit | 631364-B21 |
| HP USB BFR with PVC Free AE Keyboard/Mouse Kit | 638212-B21 |
| HP USB BFR with PVC Free RU Keyboard/Mouse Kit | 638214-B21 |
| HP USB BFR with PVC Free SE Keyboard/Mouse Kit | 672097-103 |
| HP USB BFR with PVC Free CH Keyboard/Mouse Kit | 672097-113 |
| HP USB BFR with PVC Free PT Keyboard/Mouse Kit | 672097-133 |
| HP USB BFR with PVC Free TR Keyboard/Mouse Kit | 672097-143 |
| HP USB BFR with PVC Free CZ Keyboard/Mouse Kit | 672097-223 |
| HP USB BFR with PVC Free FI Keyboard/Mouse Kit | 672097-353 |
| HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit | 672097-373 |
| HP USB BFR with PVC Free Intl Keyboard/Mouse Kit | 672097-B33 |
| HP USB BFR with PVC Free IN Keyboard/Mouse Kit | 672097-D63 |
| HP USB BFR with PVC Free KR Keyboard/Mouse Kit | 672097-D03 |
| Rail Kits | 012091-ND3 |
| HP 1U Small Form Factor Easy Install Rail Kit | 734807-B21 |
| HP 1U Cable Management Arm for Easy Install Rail Kit | 734811-B21 |
| HPE Other Options | 734011-021 |
| HP Rack LED Light Kit | BW939A |
| · · · · · · · · · · · · · · · · · · · | G7T29A |
| HP Kit LCD 1.83m Latch Display Port Cable HP Advanced Power Manager Kit | 741192-B21 |
| HP ConvergedSystem Door Branding Kit | 741192-621 TK815A |
| · · · · · · · · · · · · · · · · · · · | TK816A |
| HP ConvergedSystem Rack Light Kit | |
| HP ConvergedSystem Rack Side Panel 1075mm Kit | TK817A |
| HP Apollo 4200 Gen9 FIO Strap Shipping Bracket | 822640-B21 |



Additional Options

(UPS)

HPE Uninterruptible HPE DirectFlow Three Phase UPS **Power Systems** Power Unit (1U UPS) HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power **G9Y75A** HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power **AF478A** System HP RP12000/3 12000VA Three Phase INTL 6U Rackmount AF437A Uninterruptible Power System Input/Output Module Options for 1U UPS HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS AF488A IEC309 Input/Output Module HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS AF489A IEC309 Input/Output Module HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS AF490A Unterminated Input/Output Module HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 AF491A Input/Output Module HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 **AF492A** Input/Output Module HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS G9Y76A IEC309 Input/Output Module Power Unit (2U UPS) HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power **AF479A** System Input/Output Module Options for 2U UPS HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS AF483A IEC309 Input/Output Module HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS AF485A Unterminated Input/Output Module HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 AF486A Input/Output Module HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 **AF487A** Input/Output Module HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 **D9Q02A** Input/Output Module HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 AF484A IEC309 Input/Output Module NOTE: All Input/Output Modules support dual output outlets except the AF484A. HP DirectFlow UPS Management Card **AF493A Battery Pack Options** HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack AF480A HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack AF482A HP WW DirectFlow Secondary Battery Cable **AF497A** NOTE: Please see the HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs

for information on additional options and product specifications.

HPE Tower UPS



Additional Options

| HPE T750 G4 UPS Models | |
|---|-----------------|
| HP T750 G4 NA/JP Uninterruptible Power System | J2P85A |
| HP T750 G4 INTL Uninterruptible Power System | J2P88A |
| HPE T1000 G4 UPS Models | 021 007 (|
| HP T1000 G4 NA/JP Uninterruptible Power System | J2P86A |
| HP T1000 G4 INTL Uninterruptible Power System | J2P89A |
| HPE T1500 G4 UPS Models | 021 007 |
| HP T1500 G4 NA/JP Uninterruptible Power System | J2P87A |
| HP T1500 G4 INTL Uninterruptible Power System | J2P90A |
| HPE UPS Options | 021 007 |
| HP R/T2200 G4 Extended Runtime Module | J2R09A |
| HP R/T3000 G4 Extended Runtime Module | J2R10A |
| HP 2U Rack/Tower UPS Shipping Kit | L4Q11A |
| HPE Rack/Tower UPS | LTQTIA |
| HPE R/T2200 G4 UPS Models | |
| HP R/T2200 G4 NA/JP Uninterruptible Power System | J2R00A |
| HPE R/T3000 G4 UPS Models | 02110071 |
| HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System | J2R01A |
| HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System | J2R02A |
| HP R/T3000 G4 High Voltage INTL Uninterruptible Power System | J2R04A |
| R1500 G4 Models | 02110171 |
| HP R1500 G4 NA Uninterruptible Power System | J2Q99A |
| HP R1500 G4 JP/TWN Uninterruptible Power System | J2R05A |
| HP R1500 G4 INTL Uninterruptible Power System | J2R03A |
| R7000 Uninterruptible Power System (UPS) | 02110071 |
| HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power | AF462A |
| System | 7 . |
| HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power | AF463A |
| System | |
| R5000 Uninterruptible Power System (UPS) | |
| HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power | AF460A |
| System | |
| HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power | AF461A |
| System | |
| NOTE: To learn more, please visit the HPE Uninterruptible Power Sys | stems (UPS) web |
| <u>page</u> . | |
| | |
| HPE Enterprise Mainstream Flash Media Kits for Memory Cards | |
| HP 32GB microSD Enterprise Mainstream Flash Media Kit | 700139-B21 |
| HP 8GB microSD Enterprise Mainstream Flash Media Kit | 726116-B21 |
| HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit | 737953-B21 |
| HP Dual 8GB microSD Enterprise Midline USB Kit | 741279-B21 |



HPE USB and

SD Options

Additional Options

| HPE Suppo | rt |
|-----------|----|
| Services | |

Installation & Start-up Services HPE Installation ML/DL Series 10 Service U7WZ5E HPE Startup ML/DL Series 10 Service U7WZ7E Foundation Care HPE 3 year Foundation Care Next business day DL60 Gen9 U7VX4E Service HPE 3 year Foundation Care Next business day with DMR DL60 U7VX5E Gen9 Service HPE 3 year Foundation Care Next business day with CDMR DL60 U7VX6E Gen9 Service HPE 3 year Foundation Care 24x7 DL60 Gen9 Service U7VX7E HPE 3 year Foundation Care 24x7 wDMR DL60 Gen9 Service U7VX8E HPE 3 year Foundation Care 24x7 wCDMR DL60 Gen9 Service U7VX9E **Proactive Care** HPE 3 year Proactive Care 24x7 DL60 Gen9 Service U7WA4E HPE 3 year Proactive Care 24x7 with DMR DL60 Gen9 Service U7WA5E HPE 3 year Proactive Care 24x7 with CDMR DL60 Gen9 Service U7WA6E


NOTE: For a full list of available support services, please visit

https://ssc.hpe.com/portal/site/ssc/



Memory

Memory Population guidelines

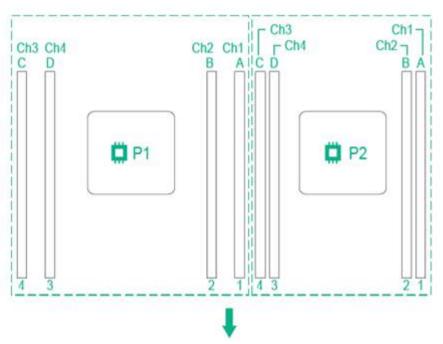

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- . To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- . When two processors are installed, balance the DIMMs across the two processors.
- . White DIMM slots denote the first slot to be populated in a channel.
- . Do not mix RDIMMs or LRDIMMs.
- . Quad rank RDIMMs are not supported in HPE ProLiant DL60 Gen9 servers.
- . DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- . The maximum memory capacity is a function of the memory type and number of installed processors.
- . To realize the performance memory capabilities listed in this document, HPE SmartMemory is required.

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family



Memory

| [DIMM Type] | R | Registered DIMMs (RDIMMs) | | | | Load Reduced (LRDIMMs) | |
|-----------------------------|------------------------|---------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| HPE SKU P/N | 726717- | 726718- | 759934- | 726719- | 728629- | - 726720- 726722- | |
| TH 2 313 1714 | B21 | B21 | B21 | B21 | B21 | B21 | B21 |
| DIMM Rank | Single Rank | Single Rank | Dual Rank | Dual Rank | Dual Rank | Dual Rank | Quad Rank |
| DIMM Capacity | 4GB | 8GB | 8GB | 16GB | 32GB | 16GB | 32GB |
| Voltage | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V |
| DRAM Depth [bit] | 512M | 1G | 512M | 1G | 1G | 2G | 2G |
| DRAM Width [bit] | x8 | x4 | x8 | x4 | x4 | x4 | x4 |
| DRAM Density | 4Gb | 4Gb | 4Gb | 4Gb | 4Gb | 8Gb | 8Gb |
| CAS Latency | 15-15- 15 | 15-15- 15 | 15-15- 15 | 15-15- 15 | 15-15- 15 | 15-15- 15 | 15-15- 15 |
| DIMM Native Speed (MT/s) | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 |
| SLOTS THAT CAN BE POPULATED | | | | , | | | |
| 8 slot servers | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| MAXIMUM CAPACITY (GB) | ' | | | | | | |
| | 32 | 64 | 64 | 128 | 256 | 128 | 256 |
| POPULATED DIMM SPEED (MT/s) | | | <u> </u> | | <u> </u> | | |
| 1 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 | 2133 |
| 2 DIMM Per Channel | n/a | n/a | n/a | n/a | n/a | n/a | n/a |
| 3 DIMM Per Channel | n/a | n/a | n/a | n/a | n/a | n/a | n/a |

DL60 has 1 DIMM per channel and hence 2 DIMMs and 3 DIMMs per channel memory speeds are not applicable o

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Famil



Memory

| emory Bandwidth and Capacity IMM Type] Registered DIMMs (RDIMMs) | | | | Load | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|
| | region | icica Diiv | וועוט (וינטוו | iviivio) | Reduced |
| | | | | | (LRDIMMs) |
| HPE SKU P/N | | 805349- | 836220- | 805351- | 805353- |
| | B21 | B21 | B21 | B21 | B21 |
| DIMM Rank | Single Rank | Single Rank | Dual Rank | Dual Rank | Dual Rank |
| DIMM Capacity | 8GB | 16GB | 16GB | 32GB | 32GB |
| Voltage | Std | Std | Std | Std | Std |
| | Voltage 1.2V | Voltage 1.2V | Voltage 1.2V | Voltage 1.2V | Voltage 1.2V |
| DRAM Depth [bit] | 1G | 1G | 2G | 2G | 2G |
| DRAM Width [bit] | x8 | x4 | x4 | x4 | x4 |
| DRAM Density | 8Gb | 8Gb | 4Gb | 8Gb | 8Gb |
| CAS Latency | 17-17- | 17-17- | 17-17- | 17-17- | 17-17-17 |
| | 17 | 17 | 17 | 17 | |
| DIMM Native Speed (MT/s) | 2400 | 2400 | 2400 | 2400 | 2400 |
| SLOTS THAT CAN BE POPULATED | | | | | |
| 8 slot servers | 8 | 8 | 8 | 8 | 8 |
| MAXIMUM CAPACITY (GB) | I | | | | |
| | 64 | 128 | 128 | 256 | 256 |
| POPULATED DIMM SPEED (MT/s) | l | ı | ı | 1 | |
| 1 DIMM Per Channel | 2400 | 2400 | 2400 | 2400 | 2400 |
| 2 DIMM Per Channel | n/a | n/a | n/a | n/a | n/a |
| 3 DIMM Per Channel | n/a | n/a | n/a | n/a | n/a |

DL60 has 1 DIMM per channel and hence 2 DIMMs and 3 DIMMs per channel memory speeds are not applicable o



Memory

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.
- ullet When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A,CPU1-B,CPU2-B,CPU1-C, CP2-C

CPU #1 IS PROCESSOR ON RIGHT - LOOKING FROM FRONT OF SERVER

| | | | | CDLL2 |
|--------|-----------|------------------|-----------|------------------|
| | | CPU 1 | | CPU 2 |
| | Slot # | population order | Slot # | population order |
| Chnl 1 | 1 | A1 | 1 | A1 |
| | | CPU 1 | | CPU 2 |
| | Slot # | population order | Slot # | population order |
| Chnl 2 | 2 | B2 | 2 | B2 |
| | | CPU 1 | | CPU 2 |
| | Slot # | population order | Slot # | population order |
| Chnl 4 | 3 | D3 | 3 | D3 |
| | | CPU 1 | | CPU 2 |
| | Slot # | population order | Slot # | population order |
| Chnl 3 | 4 | C4 | 4 | C4 |

Memory Speed by Processor Model

| Processor Models | Supported Memory Speeds |
|---------------------------------------|-------------------------|
| E5-2603v3, E5-2609v3 | 1600MT/s |
| E5-2620v3, E5-2630v3, E5-2640v3, E5- | 1866MT/s |
| 2630Lv3, E5-2623v3 | |
| E5-2650v3, E5-2660v3, E5-2650Lv3 | 2133MT/s |
| E5-2609v4, E5-2603v4 | 1866MT/s |
| E5-2623v4, E5-2620v4, E5-2630Lv4, E5- | 2133MT/s |
| 2640v4, E5-2630v4 | |
| E5-2650Lv4, E5-2660v4, E5-2650v4 | 2400MT/s |

Standard and Maximum Memory Capacity (Preconfigured Models)

| Pre Configured | Standard Memory | Maximum Memory | Standard Memory |
|-------------------|-----------------|----------------------|-----------------|
| Models | | Plus Optional Memory | Replaced with |
| | | | Optional Memory |
| E5-2603v4, E5- | 8GB (1x8GB) | 232GB (7x32GB, | 256GB (8x32GB) |
| 2609v4, E5-2609v3 | | 1x8GB) | |
| E5-2603v3 | 4GB (1x4GB) | 228GB (7x32GB, | 256GB (8x32GB) |
| | | 1x4GB) | , |




Memory

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values:

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

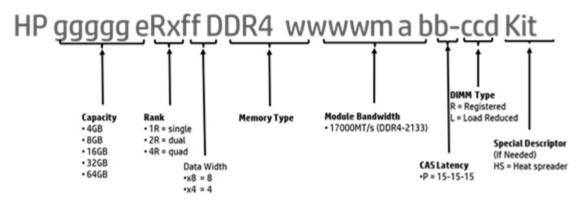



Storage



4 x LFF SATA/SAS/SSD Hot Pluggable Hard Drives Bays



Technical Specifications

System Unit Dimensions 4 LFF - 1.69 x 17.11 x 23.9 inches (4.29 x 43.46 x 60.70 cm)

 $(H \times W \times D)$

Weight Maximum: 37.44 lb (17kg)

(approximate) (all hard drives,

power supplies, and processors

installed)

Minimum: 19.82 lb (9kg)

(one hard drive, power supply, and processor

installed)

Input Rated Line 100 to 240 VAC

Requirements Voltage

for Standard Rated Input For 550W Power Supply:

460W PSU, Current 6.7 A (at 100 VAC) see power 3.3 A (at 100 VAC)

specifications Rated Input 47 to 63 Hz

tables for Frequency

detail on Rated Input 460W, 750W Power Supply: < 670 W (at 100 VAC), < 660 W (at 200 VAC),

power supplies)

BTU Rating Maximum For 550 W Power Supply:

2201 BTU/hr (at 100 VAC), 2153 BTU/hr (at 200 VAC)

Power To review typical system power ratings use the Power Advisor which is

Specifications available via the online tool located at URL:

http://www.hp.com/go/proliant-energy-efficient or

<u>http://www.hp.com/go/hppoweradvisor</u> - Click on the system of interest. Example: DL160 Gen9- Follow the instructions of the next screens.

Power Supply Rated For 550 W Power Supply: Output Steady-State 550 W (at 100 VAC),

Power 550 W (at 200 VAC), Maximum For 550 W Power Supply: Peak Power 550 W (at 100 VAC),

550 W (at 200 VAC),



Technical Specifications

System Inlet Temperature Operating

Standard Support

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

Extended Ambient Operating Support

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

NOTE: Supports A3 extended ambient.

-30° to 60°C (-22° to 140°F). Maximum rate of Non-operating

change is 20°C/hr (36°F/hr).

Minimum to be the higher (more moisture) of -12°C Relative Operating (10.4°F) dew point or 8% relative humidity. Maximum to Humidity

be the lower (less moisture) of 24°C (75.2°F) dew point or

90% relative humidity.

(noncondensing) Altitude

Nonoperating Operating

5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. 3048 m (10,000 ft). This value may be limited by the type

and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Non-9144 m (30,000 ft). Maximum allowable altitude change

operating rate is 457.2 m/min (1500 ft/min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

ldle

L WAd Entry 5.7 B

Base 5.0 B

Entry 33 dBA L pAm

Base 37 dBA

Operating

L WAd Entry 5.8 B

Base 5.5 B



Technical Specifications

L pAm Entry 38 dBA

Base 40 dBA

Emissions Classification FCC Rating Class A

Classification Normative (EMC) Standards

Normative CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; Standards ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2;

EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HPE Dynamic Smart Array B140i

Controller

Number of PCI

Four

links

PCI link rate Storage protocol 4 Gb/s SATA

support

SAS/SATA peak

6 Gb/s

data transfer rate

Number of

10 links

SAS/SATA links

SAS/SATA

2x4 connectors; 2x1 connectors

connectivity

Expander support No

Drives supported Up to 10 Internal Drives

(max)

RAID support

0, 1, 10, 5 SATA

Software

HPE SSA, SMH, SIM

management

Warranty
HPE Secure

Server warranty Not Supported

Encryption

license

HPE SmartCache Not Supported

License

HPE Smart

Supported

Storage Administrator

HPE Embedded Network

10Base-T/100Base-TX/1000Base-TX

Dual Port 361i

Interface



Technical Specifications

Adapter Compatibility IEEE 802.3 10Base-T

> IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 1588, IEEE 802.1AS

IEEE 802.3az - Energy Efficient Ethernet (EEE)

Data Transfer

PCI Express v 2.0, 5.0 GT/s, two lanes (x2)

Method

Controller Intel I350 Powerville Network 10Base-T (Half-

Transfer Rate Duplex) 10 Mb/s per port, 40 Mb/s combined

10Base-T (Full-

Duplex) 20 Mb/s per port, 80 Mb/s combined

100Base-TX

(Half-Duplex) 100 Mb/s per port, 400 Mb/s combined

100Base-TX

(Full-Duplex) 200 Mb/s per port, 800 Mb/s combined

1000Base-TX (Half and Full-

1000Mb/s per port, 4000 Mb/s combined Duplex)

Connector Two RJ-45

Cable Support 10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)

10/100/1000 Base- Category 5 or higher UTP; up to 328 ft (100 m)

TΧ

Environmentand Approach

End-of-life friendly Products Management and Recycling

Hewlett-Packard offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to:

http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible

manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and resell Hewlett Packard Enterprise equipment.



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------------|---------|--|
| 20-Jun-2016 | From Version 13 to 14 | Changed | The HPE I/O Expansion Options section was revised. |
| 6-Jun-2016 | From Version 12 to 13 | Added | Added new HDD offering to the HPE Drives section. |
| | | | New options added to the HPE Disk Backup and HPE Storage Options. |
| | | Changed | Memory section was revised. |
| 8-Apr-2016 | From Version 11 to 12 | Changed | HPE Processors section was revised. |
| 31-Mar-2016 | From Version 10 to 11 | Added | Added new HPE Smart Memory 2400 MHz memory, support for Intel Xeon E5-2600v4 processor, new HPE Trusted Platform Module (TPM) 2.0, and new 900W AC/ 240VDC power supply. |
| | | Changed | Memory, Maximum Internal Storage, Power Supply, Upgradeability, HPE Server UEFI/Legacy ROM, Embedded Management, HPE Security, Service and Support, Pre-configured Models, HPE Memory, and HPE Power Supplies sections were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 16-Feb-2016 | From Version 9 to 10 | Added | New HDD offering was added to HPE Drives. |
| | | Changed | HPE Power Supplies, HPE Data Center Racks, and HPE Power Distribution Units (PDUs) were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 1-Dec-2015 | From Version 8 to 9 | Added | New options added to HPE Tape Backup, HPE Disk Backup, HPE Rack Mount Consoles, and KVM Switches, and Keyboards. |
| | | Changed | On System Management Chipset, Memory, Maximum Internal Storage, Embedded Management, and Server utilities were revised. |
| | | | Product images were updated. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 23-Oct-2015 | From Version 7 to 8 | Changed | Memory and HPE Security were revised. |
| 28-Sep-2015 | From Version 6 to 7 | Added | Added new 6Gb SATA Solid State Drives. Added new HPE OneView management software. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |




HPE ProLiant DL60 Generation9 (Gen9)

| Summary of C | Changes | | |
|--------------|---------------------|---------|---|
| 17-Aug-2015 | From Version 5 to 6 | Added | New Solid State Drives offering was added to Core Options. |
| | | Changed | Maximum Internal Storage was revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 1-Jun-2015 | From Version 4 to 5 | Added | New Hard Drives were added to Core Options. |
| | | | New options added to HPE Power Supplies. |
| | | | New HPE OneView LTUs added to HPE Converged Infrastructure Management Software. |
| | | | New RDX+ external backup options were added. |
| | | Changed | Core Options and Additional Options were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 24-Apr-2015 | From Version 3 to 4 | Added | Added 813534-B21 and 813535-B21 to HPE Power Supplies. |
| 30-Mar-2015 | From Version 2 to 3 | Added | New Hard Drives offering. |
| | | | Optional Software added to HPE Storage Controllers. |
| | | Changed | HPE Memory, HPE Disk Storage Systems, HPE USB and SD Options, HPE Storage Controllers, and HPE Disk Storage Systems were updated. |
| 9-Feb-2015 | From Version 1 to 2 | Added | Added HPE Insight Software, HPE Disk Backup. |
| | | | Added new HPE Drives and new G4 UPS models. |
| | | Changed | HPE Memory, HPE Drives, HPE Tape Backup, HPE Rack Mount Consoles, KVM Switches, and Keyboards, and HPE Uninterruptible Power Systems (UPS) sections were revised. |





Summary of Changes



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04447824 - 15088 - Worldwide - V14 - 20-June-2016



